

# M100HM



## FEATURES

- // Capable of 10,000 Lbs. of clamp force
- // Sealed actuation mechanism
- // Self adjusting mechanism minimizes maintenance for pad wear
- // Quick change brake pads, retained by mount pins
- // Nodular cast iron housing
- // Splined actuator lever can be positioned in 30° increments
- // Choice of CW or CCW lever actuation




## SPECIFICATIONS

WEIGHT	21.5 Lbs.
ROTOR DIAMETER	10" - 30"
ROTOR THICKNESS	.5" - 1.0"
LINING TYPE	Non-Asbestos Organic, Sintered
TOTAL LINING AREA	14.0 Sq. In.
USABLE LINING THICKNESS PER PAD	.333"

Specifications are guidelines only and subject to change. Consult Hayes Performance Systems for specific model, part number, and assembly drawings - contact@hbpsi.com.

## TORQUE INFORMATION

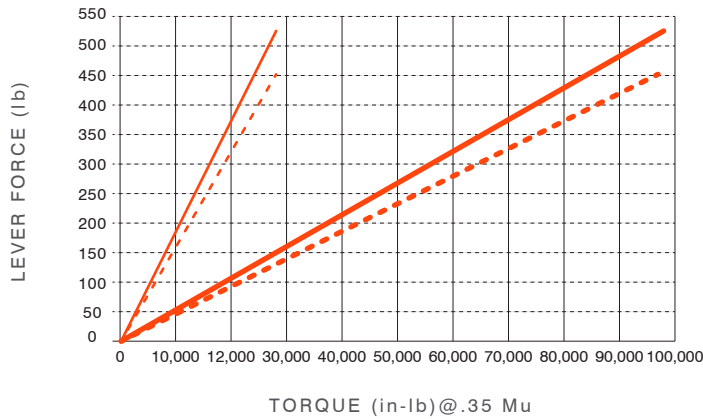

- Dia = 10 in, Lever length = 3.75 in
- - - Dia = 30 in, Lever length = 3.75 in
- · · Dia = 10 in, Lever length = 4.375 in
- · - · Dia = 30 in, Lever length = 4.375 in

## REFERENCE DIMENSIONS

