


1-663-1S



FEATURES

- // Capable of 10000 lbs. of clamp force
- // One-piece nodular iron housing
- // Ideal for mount on driveline or in the wheel
- // Square seal piston retraction for constant running clearance
- // Supplied with mount bolts and sealed and lubricated slider pins
- // Variety of inlet and bleeder options for mounting flexibility
- // Quick change pads

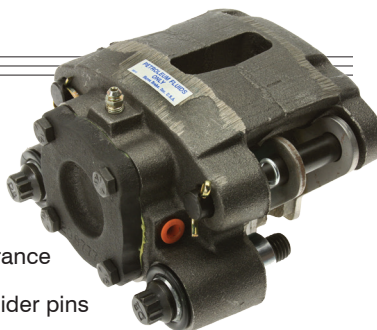


SPECIFICATIONS

WEIGHT	18 Lbs.
ROTOR DIAMETER	10" - 20"
ROTOR THICKNESS	.5" - 1.0"
LINING TYPE	Non-Asbestos Organic, Sintered, Semi-Metallic
TOTAL LINING AREA	14.5 Sq. In.
USABLE LINING THICKNESS PER PAD	.328"
PISTON DIAMETER	2.6"
MAX PRESSURE	2000 Psi
FLUID DISPLACEMENT	.20 Cu. In.
FLUID TYPE	Brake Fluid, Hydraulic Oil
FLUID INLET	12:00, 3:00, 9:00
BLEEDER	12:00, 3:00, 9:00

Specifications are guidelines only and subject to change. Consult Hayes Performance Systems for specific model, part number, and assembly drawings - contact@hbpsi.com.

TORQUE INFORMATION

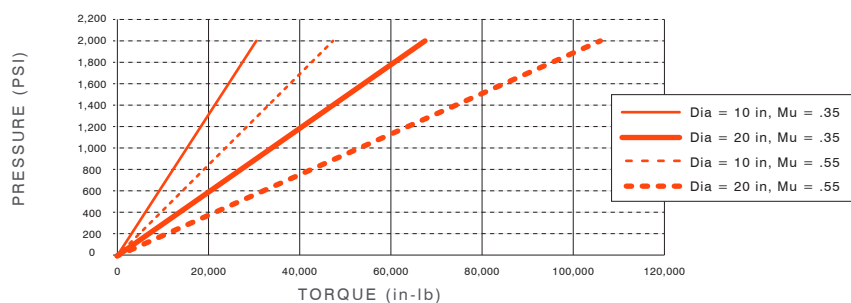

REFERENCE DIMENSIONS

